Cylinder with Guiding
Ø32-100 mm

- **Guiding- and Stopper Cylinder**
- **Guiding accuracy ± 0,02 mm**
- **Non-rotation accuracy ± 0,02°**
- **Integrated strong guide rods**
- **Variant with 4 ball bearings for precision linear guiding**
- **Variant with 4 plain bearings to absorb high side loads**
- **Easy installation**
- **Magnetic piston as standard**
- **Buffer pad for noise reduction**

Technical Data

Medium:
Compressed air filtered, lubricated or non-lubricated

Operating Pressure:
1 to 10 bar

Operating Temperature:
-10 to +80 °C

Cylinder Diameters:
32, 40, 50, 63, 80 (Cylinder with plain bearings)
32, 40, 50, 63, 80, 100 (Cylinder with ball bearings)

Standard Strokes:
25, 50, 75, 100 mm

* Non standard strokes available (100 mm max.). They have the dimensions of the next longer standard stroke.

Materials:
Profile barrel: Anodised aluminium
Piston rod: Stainless steel (Martensitic)
Guide rod: Stainless steel (Martensitic)
(Cylinder with plain bearings)
Hardened steel, hard-chrome plated
(Cylinder with ball bearings)
Slide bearings: Solid bronze
(Cylinder with plain bearings)
Steel roller bearings
(Cylinder with ball bearings)
Mounting plate: Stainless steel (Austenitic)
Piston rod seals: Polyurethane
Piston seals: Nitrile rubber
'O'-rings: Nitrile rubber
Buffer: Polyurethane

Ordering Examples

See page N **2.3.**013.02

Switches

See page N **2.3.**013.02



Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

Cylinder Variants

Symbol	Model	Description	Dimensions see page
	M/61000/M	Cylinder with plain bearings (Ø 32 to 80 mm)	8
	M/61000/MR	Cylinder with ball bearings (Ø 32 to 100 mm)	8
	M/61000/W2R	Cylinder with ball bearings and special wipers (Ø 32 to 100 mm) for applications in welding areas	on request

Modelcodes

M/61✶✶✶/✶✶/✶✶✶

Cylinder Diameters (mm)	**Substitute**
32	**032**
40	**040**
50	**050**
63	**063**
80	**080**
100	**100**

Strokes (mm)	**Substitute**
25	**25**
50	**50**
75	**75**
100	**100**

Variants (magnetic piston)	**Substitute**
Plain bearings (Ø 32 to 80 mm)	**M**
Ball bearings (Ø 32 to 100 mm)	**MR**
Ball bearings and special wipers (Ø 32 to 100 mm)	**W2R**

Note: If option is not required, disregard option position within part number eg. M/61032/M/25

Switches

Model	Cable	Plug (M8x1)
Reed	M/50/LSU/..	M/50/LSU/CP
	M/50/RAC/5V	—
Solid state	M/50/EAP/..	M/50/EAP/CP
	M/50/EAN/..	M/50/EAN/CP

Model		Voltage		Current	Temperature	LED	Features	Cable/Plug	Cable	Plug-in Cable		Catalogue
Reed	Solid State	V a.c.	V d.c.	Max.	°C				Type	Straight	90°	Page
M/50/LSU/*V	—	10 to 240	10 to 170	180 mA	-20° to +80°	●	—	2, 5, 10 m	PVC 2 x 0,25	—	—	N **4.3.**005
M/50/LSU/5U	—	10 to 240	10 to 170	180 mA	-20° to +80°	●	—	5 m	PUR 2 x 0,25	—	—	N **4.3.**005
M/50/RAC/5V	—	10 to 240	10 to 170	180 mA	-20° to +80°	—	Changeover	5 m	PVC 3 x 0,25	—	—	N **4.3.**005
M/50/LSU/CP	—	10 to 60	10 to 75	180 mA	-20° to +80°	●	—	Plug M8x1	—	M/P73001/5	—	N **4.3.**005
—	M/50/EAP/*V	—	10 to 30	150 mA	-20° to +80°	●	PNP	2, 5, 10 m	PVC 3 x 0,25	—	—	N **4.3.**007
—	M/50/EAP/CP	—	10 to 30	150 mA	-20° to +80°	●	PNP	Plug M8x1	—	M/P73001/5	—	N **4.3.**007
—	M/50/EAN/*V	—	10 to 30	150 mA	-20° to +80°	●	NPN	2, 5, 10 m	PVC 3 x 0,25	—	—	N **4.3.**007
—	M/50/EAN/CP	—	10 to 30	150 mA	-20° to +80°	●	NPN	Plug M8x1	—	M/P73001/5	—	N **4.3.**007

* Insert cable length
Full information on switches (technical data, cable materials, dimensions etc.) please refer to relevant catalogue pages

Ordering Examples

Cylinders
To order e.g. a standard 50 mm bore cylinder with a 25 mm stroke with ball bearings quote: **M/61050/MR/25**

Switches
To order e.g. a reed switch with LED and 2 m cable length quote: **M/50/LSU/2V**

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

Theoretical Forces • Air Consumption

Cylinder ∅ (mm)	Theoretical forces (N) at 6 bar		Air consumption (l/cm stroke) at 6 bar	
	Outstroke	Instroke	Outstroke	Instroke
32	482	414	0,056	0,048
40	754	633	0,088	0,074
50	1178	990	0,137	0,114
63	1870	1680	0,218	0,195
80	3016	2722	0,35	0,32
100	4710	4416	0,55	0,51

Weight (kg)

	Cylinder ∅ (mm)	25 mm stroke	50 mm stroke	75 mm stroke	100 mm stroke
M/61000/M	32	1,50	1,99	2,48	2,97
Cylinder with plain bearings	40	1,70	2,21	2,72	3,23
	50	2,40	3,10	3,80	4,50
	63	3,10	3,91	4,72	5,53
	80	6,45	7,77	9,09	10,40
M/61000/MR	32	1,25	1,65	2,05	2,45
Cylinder with ball bearings	40	1,45	1,87	2,29	2,71
	50	2,10	2,68	3,26	3,84
	63	2,60	3,27	3,94	4,61
	80	5,99	7,14	8,29	9,44
	100	9,16	10,75	12,35	13,95

Guiding Accuracy

Deflection of the mounting plate X (mm) at instroke and outstroke position without load



Cylinder ∅ mm	32		40		50		63		80		100	
	Instroke	Outstroke	Instroke	Outstroke	Instroke	Outstroke	Instroke	Outstroke	Instroke	Outstroke	Instroke	Outstroke
Position												
Cylinder with plain bearings	± 0,06	± 0,11	± 0,06	± 0,11	± 0,06	± 0,11	± 0,06	± 0,11	± 0,07	± 0.11	–	–
Cylinder with ball bearings	± 0,02	± 0,04	± 0,02	± 0,04	± 0,03	± 0,05	± 0,03	± 0,05	± 0,03	± 0,05	± 0,03	± 0,05

Non-rotation Accuaracy

Deflection of the mounting plate ß (°) at instroke position without load



Cylinder ∅ mm	32	40	50	63	80	100
Cylinder with plain bearings	± 0,06	± 0,06	± 0,05	± 0,05	± 0,04	–
Cylinder with ball bearings	± 0,03	± 0,03	± 0,03	± 0,03	± 0,02	± 0,02

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

Load Data

General:
- The combination of different load cases (e.g. load plus torque or eccentricity in two directions) will reduce the permissible load accordingly.
- Keep the guide rods free from any pollution

Maximum Load F_L (N)

Depending on the stroke

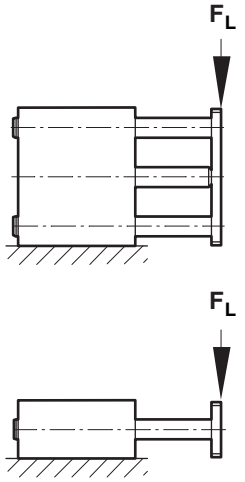

Maximum Load F_L (N) at the front plate

Cylinder ∅ (mm)	Stroke (mm) / Model	25	50	75	100
32	M/61032/M	212	214	215	216
	M/61032/MR	163	179	187	191
40	M/61040/M	227	224	223	222
	M/61040/MR	181	191	195	198
50	M/61050/M	324	331	334	337
	M/61050/MR	223	236	242	246
63	M/61063/M	343	343	343	344
	M/61063/MR	251	254	256	257
80	M/61080/M	470	479	484	487
	M/61080/MR	423	459	477	488
100	M/61100/MR	902	761	799	821

Maximum Load F_L' (N) at the distance Δl

A distance between the force and the front plate (e.g. force in the centre of gravity of a load) will reduce the permissible load as follows:

$$F_L' = F_L \times \left(\frac{b}{b+\Delta l}\right)$$

F_L' – Max. load at the distance Δl (N)

F_L – Max. load at the front plate (N)

Δl – Distance (mm)

b = a + 2 x stroke (mm)

a – Constant (mm)

Cylinder ∅ (mm)	32	40	50	63	80	100
a	32	39	41	46	54	59

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.

Maximum Torque M_D (Nm)

Depending on the stroke

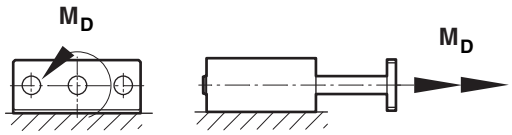

Maximum Kinetic Energy E_s (Nm)

Cylinder Ø (mm)	32	40	50	63	80	100
E_s						

Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document.